

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS


IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: H01Q 1/24	A1	(11) International Publication Number: WO 99/25042 (43) International Publication Date: 20 May 1999 (20.05.99)
(21) International Application Number: PCT/SE98/01897 (22) International Filing Date: 21 October 1998 (21.10.98) (30) Priority Data: 9704051-3 6 November 1997 (06.11.97) SE (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: YING, Zhinong; S:t Hans Gränd 24B, S-226 42 Lund (SE). MÅRTENSSON, Dag; Backagården, Holmby 16:4, S-240 32 Flyinge (SE). HÅKANSSON, Kenneth; Börringegatan 1B, S-217 72 Malmö (SE). (74) Agents: STRÖM, Tore et al.; Ström & Gulliksson AB, P.O. Box 4188, S-203 13 Malmö (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: A PORTABLE ELECTRONIC COMMUNICATION DEVICE WITH MULTI-BAND ANTENNA SYSTEM		
(57) Abstract A portable electronic communication device (10), such as a mobile telephone, has first and second housing elements (12, 14), which are movable relative to each other, and an antenna system (40; 50; 60; 70) for electro-magnetic communication within at least two different frequency bands. The antenna system is made by a printed pattern (40; 50; 60; 70) of an electrically conductive material, which is arranged on the second housing element (14) and is connected to means for radio communication inside the first housing element (12). A first portion (42; 52; 62; 72) of the printed pattern (40) resonates at a frequency within a first frequency band, and a second portion (44; 54; 64; 74) of the printed pattern resonates at a frequency within a second frequency band.		

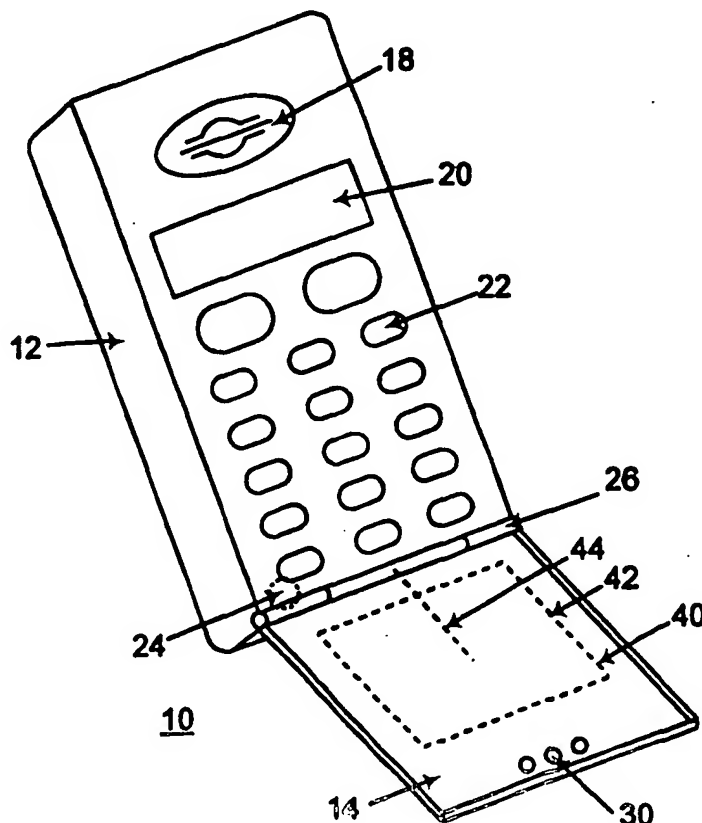

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

A PORTABLE ELECTRONIC COMMUNICATION DEVICE WITH MULTI-BAND ANTENNA SYSTEM

Technical Field

5 The present invention relates to a portable electronic communication device, comprising a first housing element, a second housing element, which is movable relative to the first housing element, and an antenna system for electromagnetic communication within at least
10 two different frequency bands.

Description of the Prior Art

Mobile or cellular telephones are nowadays perhaps the most common examples of portable electronic communication devices according to the above. Many different digital
15 systems for mobile telecommunications have entered the market in recent years. GSM (Global System for Mobile Communication), for instance, is well-spread across virtually all European countries as well as many places in
20 Asia, Australia, and America. Other common examples are DCS (Digital Communications System), PCS (Personal Communications System), etc. Normally, these mobile telecommunications systems operate in different frequency ranges. In Europe, for instance, GSM uses the 890-960 MHz band, while
25 DCS uses 1710-1880 MHz and PCS uses 1850-1990 MHz. In many countries a plurality of systems are used in parallel to each other, normally operating in different frequency bands, and hence the need for multi-band mobile telephones has become all the more urgent. The need is accentuated by
30 the fact that new kinds of mobile telecommunications services, such as home-based wireless telephones, wireless hands-free sets, wireless LANs (operating in the 2,4-2,5 GHz band), etc, are to be introduced in a near future, or are in fact already here. Consequently, there is an obvious
35 and strong need and demand for communication devices with multi-band antennas.

A general dual or multi-band antenna design is for instance disclosed in WO96/38882 (Ericsson Inc.), where a multi-band printed monopole antenna is operative in two different frequency bands thanks to a parasitic element
5 arranged close to the monopole antenna. The monopole antenna is arranged to be placed, in a conventional way, on top of the telephone apparatus housing. The printed monopole antenna is made from a conductive trace with an electric length, such that a primary resonance occurs
10 within a first frequency band. The parasitic element, which has no direct electric connection with the conductive trace, is arranged to tune the conductive trace into a secondary resonance within a second frequency band.

WO94/25999 (Motorola, Inc.) discloses an antenna,
15 which is arranged in the flip of an electronic apparatus, such as a radio telephone. A transformer is arranged at a hinge mechanism to connect the flip to the main apparatus housing. One transformer winding is located in the apparatus housing, while a second winding is located in the
20 flip. The purpose of the transformer is to couple electromagnetic energy between the antenna in the flip and other electronics located in the apparatus housing as well as to act as an impedance matching element. The antenna according to WO94/25999 is arranged to work in one single frequency
25 band only.

US-A-5 337 061 (Shaye Communications Ltd) relates to a wireless telephone with a foldable flip pivotally connected thereto. A first antenna is arranged in the flip, and a second antenna is located in the main portion of the telephone, i.e. the apparatus housing. By carefully selecting
30 the design of the two antennas the need has been eliminated for a separate device for switching between the two antennas. However, the two antennas are arranged to operate in the same frequency band, since the telephone according
35 to US-A-5 337 061 is aimed at obtaining optimum antenna

performance during ongoing calls (wherein the first antenna is operative, and the flip is folded down), as well as in stand-by mode (wherein the second antenna is operative, and the flip is folded up).

5

Summary of the Invention

An object of the present invention is to provide a portable electronic communication device, comprising a main housing element and a foldable housing element hinged to the former, with a multi-band antenna system with improved efficiency, as compared to the prior art. In particular, the invention is aimed at providing a novel and inventive antenna design for such communication devices, said antenna system being able to operate in at least two different frequency bands without any need for an impedance matching network or a separate device for switching between the frequency bands.

The objects of the invention are achieved by providing the foldable housing element (e.g. a flip) with a printed pattern of an electrically conductive material, wherein a first portion of the printed pattern is arranged to resonate at a frequency within a first frequency band, while a second portion of the printed pattern is arranged to resonate at a frequency within a second frequency band. The printed pattern acts as a multi-band antenna system and is connected to means for radio communication (e.g. radio circuitry) inside the main housing element (e.g. a telephone housing).

Further objects, features and merits of the present invention appear from the following detailed description of several embodiments of the invention, and from the appended subclaims as well as the drawings.

Brief Description of the Drawings

The present invention will now be described in more detail by way of embodiment examples, reference being made to the accompanying drawings, in which

5 FIG 1 illustrates a portable mobile or cellular telephone according to the prior art,

 FIG 2 is a schematic illustration of a portable electronic communication device according to the present invention,

10 FIG 3 schematically illustrates the operating principle of a multi-band antenna system according to the present invention,

 FIG 4 illustrates a first design, in the form of a Q-type pattern, of a printed antenna pattern according to a
15 first embodiment of the present invention,

 FIG 5 illustrates an alternative to the printed antenna pattern according to FIG 4,

 FIG 6 illustrates a design example for a printed antenna pattern according to an embodiment of the inven-
20 tion, which is particularly adapted for providing polarization diversity,

 FIG 7 illustrates an alternative to the printed antenna pattern according to FIG 6, and

 FIG 8 is a diagram illustrating experimental results
25 obtained for the embodiment according to FIG 4.

Detailed Disclosure of the Invention

In FIG 1 there is shown a portable electronic communication device 10, or more specifically a mobile telephone, with a multi-band antenna system 16 according to the
30 prior art. The mobile telephone 10 is a conventional cellular telephone, which is arranged to operate in two different frequency bands, such as the GSM band and the PCS band. The telephone 10 comprises an apparatus housing 12
35 and a foldable flip 14, which is pivotally mounted to the

apparatus housing 12 by means of a hinge mechanism 26. In a conventional way the flip 14 will normally be folded up along the apparatus housing 12, thereby covering a lower portion of the front side of the telephone. When the
5 telephone is to be used for answering an incoming call or initiating an outgoing call, the user will fold down the flip 14, so that it takes on a position according to FIG 1.

The telephone comprises a multi-band antenna system 16, consisting of two antennas 16a and 16b, wherein the
10 first antenna 16a for instance is a retractable whip antenna, while the second antenna 16b is a stub or helix antenna. The antenna system 16 is, as appears from FIG 1, arranged on top of the apparatus housing 12. Furthermore, the telephone comprises an earpiece or loudspeaker 18, a
15 display 20, a keypad 22 and a microphone 24. The microphone 24 is arranged at the bottom of the apparatus housing 12 and is connected to a first end of a sound-guiding channel 28 formed inside the flip 14. A second end of the sound-guiding channel 28 is connected to openings 30 in the flip
20 14 for receiving acoustic soundwaves from the mouth of the talking user.

FIG 2 illustrates, on a schematic level, a portable electronic communication device 10 according to the present invention. The communication device is, for exemplifying
25 but not limiting reasons, illustrated as a mobile telephone, which in similarity to the prior art telephone of FIG 1 comprises an apparatus housing 12 and a flip 14 pivotally mounted to the former by means of a hinge mechanism 26. Furthermore, the loudspeaker 18, the display
30 20, the keypad 22 and the microphone 24 are all essentially identical to the corresponding ones in FIG 1 and hence do not require any further explanation herein. Additionally, in similarity to FIG 1, the interior of the flip 14 may be provided with a sound-guiding channel extending from sound
35 openings 30 in a lower portion of the flip to the micro-

phone 24, which is located inside the bottom of the apparatus housing 12. For reasons of clarity the sound guiding channel has not been illustrated in FIG 2.

The major difference between the prior art telephone according to FIG 1 and the inventive telephone according to FIG 2 is that the conventional multi-band antenna arrangement 16 in FIG 1, which is mounted on the upper external surface of the apparatus housing 12, has been replaced by an inventive printed antenna 40, which is arranged on or in the flip 14. The printed antenna 40 is connected to radio circuitry known per se inside the apparatus housing 12 and may hence supply and receive high frequency electric currents to and from the radio circuitry.

The printed antenna 40 is described on a principal level in FIG 3. The antenna system 40 comprises a first portion 1 and a second portion 2, both of which are joined at a common node 3. The antenna portions 1 and 2 are fed, through the node 3, by a grounded signal generator 4. In a real-world application the signal generator represents e.g. the radio circuitry in the mobile telephone 10 of FIG 2. The first portion 1 is resonant at a first frequency f_1 , while the second portion 2 is resonant at a second frequency f_2 .

By carefully designing the printed antenna pattern according to the present invention a multi-band antenna with two or more resonant frequencies is obtained, as will be described in more detail below with reference to the different embodiments of the invention. Different portions of the printed antenna pattern are resonant in different frequency bands, and hence the antenna may operate as a multi-band antenna without any impedance matching network or means for switching between the frequency bands. For instance, a triple resonant antenna (GSM, DCS or PCS, and wireless LAN) may be obtained by designing the printed pattern of the antenna accordingly. By varying the printed

pattern, the antenna may be given different polarization and may be used as a diversity antenna together with a conventional top-mounted antenna not disclosed herein.

In the schematic example of FIG 2 a first portion 42
5 of a printed antenna pattern 40 is resonant at a first frequency within, e.g., the GSM band. A second portion 44 of the pattern 40 is non-resonant and thus inactive for frequencies within this first frequency band.

The second portion 44 is, on the other hand, resonant
10 in a different frequency band, such as the DCS or PCS band at about 1800 MHz, while the first portion 42 is non-resonant and thus inactive for frequencies outside the first frequency band (GSM) at about 900 MHz.

Hence, when the flip is in its opened position according to FIG 2, the antenna 40 may operate, by means of the
15 portions 42 and 44, respectively, in different frequency bands depending on the frequency of the current supplied from the radio circuitry inside the apparatus housing 12. When the flip is closed, i.e. folded up along the apparatus
20 housing 12, thereby covering the keypad 22, the antenna may still be operative in at least the higher frequency band. A multi-band antenna pattern arranged in the flip according to the present invention has an important advantage, as compared to the prior art, in that the interaction between
25 the human body of the user and the antenna will be substantially reduced, since the distance between the antenna and the human body is larger than the corresponding distance for a prior art telephone according to, e.g., FIG 1. Thus, the efficiency of the antenna is improved. As an additional
30 advantage the radiofrequent interference with the acoustic circuits inside the apparatus housing is reduced as well. Furthermore, the antenna design proposed according to the invention makes the connection easier between the external antenna and the radio circuitry inside the apparatus
35 housing 12. Another important advantage is that the design

of the printed antenna pattern may very easily be modified or adapted to different applications, such as different frequency bands, different polarization, etc. A few examples of such modifications will be described below with
5 reference to the remaining figures.

In FIG 4 a first embodiment of the printed antenna pattern according to the present invention is disclosed. As previously described the antenna pattern 40 is constituted by a printed trace of an electric conductor arranged on or
10 inside the flip 14. The pattern may be described as having the shape of a Q character, comprising a large rectangular frame portion 42 and a smaller linear portion 44. The portions 42 and 44 are electrically connected to each other and to the apparatus housing 12 through an external antenna
15 connector 46 arranged close to the hinge mechanism (not disclosed in this figure). The large rectangular portion 42 is resonant within the GSM band (around 900 MHz), and the short linear strip 44 is resonant within the DCS and/or PCS band (around 1800-1900 MHz). In this embodiment the
20 polarization of the antenna 40 will be the same as for a conventional stub antenna.

FIG 5 illustrates an alternative version of the embodiment in FIG 4, namely a modified Q-type pattern. The printed antenna pattern 50 is arranged in or on the flip
25 14, which in accordance with the above is hinged to the apparatus housing 12. A first large portion 52 of the printed pattern is given a meander shape surrounding a major part of a second smaller portion 54 of the printed pattern 50, said second portion 54 having a linear extension and being connected to the apparatus housing 12
30 through the external antenna connector 56, in accordance with FIG 3. The alternative embodiment according to FIG 5 is particularly suitable for small telephones having a flip of a limited size. The first large portion 52 is resonant

within the GSM band, while the second smaller portion 54 is resonant within the DCS and/or PCS band.

FIG 6 illustrates another embodiment of the present invention, wherein the antenna is realized as an unbalanced dipole antenna 60, which has perpendicular polarization as compared to a stub antenna. The unbalanced dipole antenna 60 comprises a first larger branch 62 as well as a second smaller branch 64, both of which are extending perpendicularly to a linear base portion 66 of the printed antenna pattern 60. The base portion 66 is arranged in parallel to a grounded strip 68, which is electrically connected to the apparatus housing 12. The base portion 66 is connected, via an external antenna connector 67, to the radio circuitry inside the apparatus housing 12. Hence, the antenna 60 is of an F-type antenna. The larger branch 62 operates (i.e., resonates) in the GSM band, and the smaller branch 64 operates in the DCS and/or PCS band.

FIG 7 illustrates an alternative to the embodiment in FIG 6. Here, the larger branch portion 72 as well as the smaller branch portion 74 of the printed antenna pattern 70 are both given a meander shape.

The larger branch portion 72 is, in similarity to the corresponding branch portion 62 in FIG 6, arranged to resonate at a frequency within the GSM band, while the smaller branch portion 74 is arranged to resonate at a frequency within the higher DCS and/or PCS band. As in FIG 6, the linear base portion 76 is connected to the external antenna connector 77 and is arranged in parallel to a grounded strip 78 which is connected to the apparatus housing 12.

In FIG 8 a diagram is shown, indicating experimental results obtained for the first embodiment, which was described with reference to FIGs 2 and 4. These experiments have verified that such a printed flip antenna can be tuned into several resonances. The interval between two resonant

frequencies and the bandwidth of each frequency are depending on the design of the pattern of the printed antenna. The lowest resonant frequency (indicated by an arrow 1) is mainly depending on the size of the larger portion of the printed pattern, while a higher resonant frequency (indicated by an arrow 2) is depending on the small portion of the antenna. The large frame portion is resonant as a quarter-wave antenna at the GSM band (900 MHz), and the small linear portion is resonant as a quarterwave antenna at the DCS and/or PCS band (1800-1900 MHz). A higher order resonance (indicated by an arrow 3) occurs for the large frame portion, acting as a three-quarterwave antenna, at about 2,4 GHz, which covers the wireless LAN band. The diagram of FIG 8 illustrates the so called return-loss performance (VSWR), and it appears from the diagram that the Q-type flip antenna according to FIGs 2 and 4 has a very broad bandwidth. Furthermore, testings as regards radiation pattern in talk position, i.e. when the flip is folded out, have been carried out. These experiments have verified that a flip antenna system according to the present invention has a more uniform radiation pattern as compared to a normal stub antenna system according to the prior art.

The invention has been described above with reference to a set of embodiments, the selection of which has been made for exemplifying reasons only. Hence, the invention shall in no way be regarded to be restricted to these embodiments. On the contrary, the scope of the invention shall be restricted only by the scope of the appended independent patent claims. In particular, it is to be noted that the exemplary frequency bands referred to in the description above, i.e. the GSM, DCS/PCS, and wireless LAN bands, are only to be regarded as examples. Furthermore, the design of the printed antenna pattern may be varied in ways other than the ones disclosed above, as long as the functional requirements defined by the independent claims

are fulfilled. Additionally, the flip may be located on top of the apparatus housing 12, at a long side thereof, etc.

CLAIMS

1. A portable electronic communication device (10), comprising a first housing element (12), a second housing element (14), which is movable relative to the first
5 housing element, and an antenna system (16; 40) for electromagnetic communication within at least two different frequency bands, c h a r a c t e r i z e d by

a printed pattern (40; 50; 60; 70) of an electrically conductive material, which is arranged on or in the second
10 housing element (14) and is connected to means for radio communication inside the first housing element (12), a first portion (42; 52; 62; 72) of said printed pattern (40) being arranged to resonate at a frequency within a first frequency band, and a second portion (44; 54; 64; 74) of
15 said printed pattern being arranged to resonate at a frequency within a second frequency band.

2. A device according to claim 1, c h a r a c t e r i z e d in that the first portion (42; 52) of the printed pattern (40; 50) is formed along an
20 endless trace, and the second portion (44; 54) of the printed pattern is formed along a limited trace, so that the first printed pattern portion (42; 52) surrounds at least a major part of the second printed pattern portion
25 (44; 54).

3. A device according to claim 1 or 2, c h a r a c t e r i z e d in that the first printed pattern portion (52) is formed along an endless meander-
30 shaped trace.

4. A device according to claim 1, c h a r a c t e r i z e d in that said first and second portions (62, 64; 72, 74) of said printed pattern (60; 70)
35 are formed as branches extending from a linear base portion (66; 76) of the printed pattern (60; 70), said linear base

portion (66; 76) being arranged adjacent to a grounded strip (68; 78), which is connected to the first housing element (12).

5 5. A device according to claim 4,
c h a r a c t e r i z e d in that at least one of the
branches (72, 74) of the printed pattern (70) is formed
along a meander-shaped trace.

10 6. A device according to any preceding claim,
c h a r a c t e r i z e d in that said device (10) is a
radio telephone.

15 7. A device according to any preceding claim,
c h a r a c t e r i z e d in that said device (10) is a
digital cellular telephone.

20 8. A device according to claim 7,
c h a r a c t e r i z e d in that said first housing
element (12) is the main telephone body, while said second
housing element (14) is a flip, which is pivotally mounted
to the main telephone body by means of a hinge arrangement
(26).

25 9. A device according to any preceding claim,
c h a r a c t e r i z e d in that said first printed
pattern portion (42; 52; 62; 72) is arranged to resonate at
a frequency within the GSM band, while said second printed
pattern portion (44; 54; 64; 74) is arranged to resonate at
30 a frequency within the DCS or PCS frequency band.

35 10. A multi-band antenna system for a portable
electronic communication device, preferably a radio
telephone or cellular telephone (10), comprising a main
apparatus housing (12) and a flip (14), which is pivotally

mounted to the main apparatus portion (12) by means of a hinge mechanism (26), c h a r a c t e r i z e d by

a printed pattern (40; 50; 60; 70) of an electrically conductive material arranged on the flip (14), a first
5 portion (42; 52; 62; 72) of said printed pattern (40; 50; 60; 70) being arranged to resonate at a frequency within a first frequency band, and a second portion (44; 54; 64; 74) of said printed pattern being arranged to resonate at a frequency within a second frequency band.

10

11. An antenna system according to claim 10, c h a r a c t e r i z e d in that said first frequency band is the GSM band, while said second frequency band is the DCS or PCS band.

15

20

FIG 1

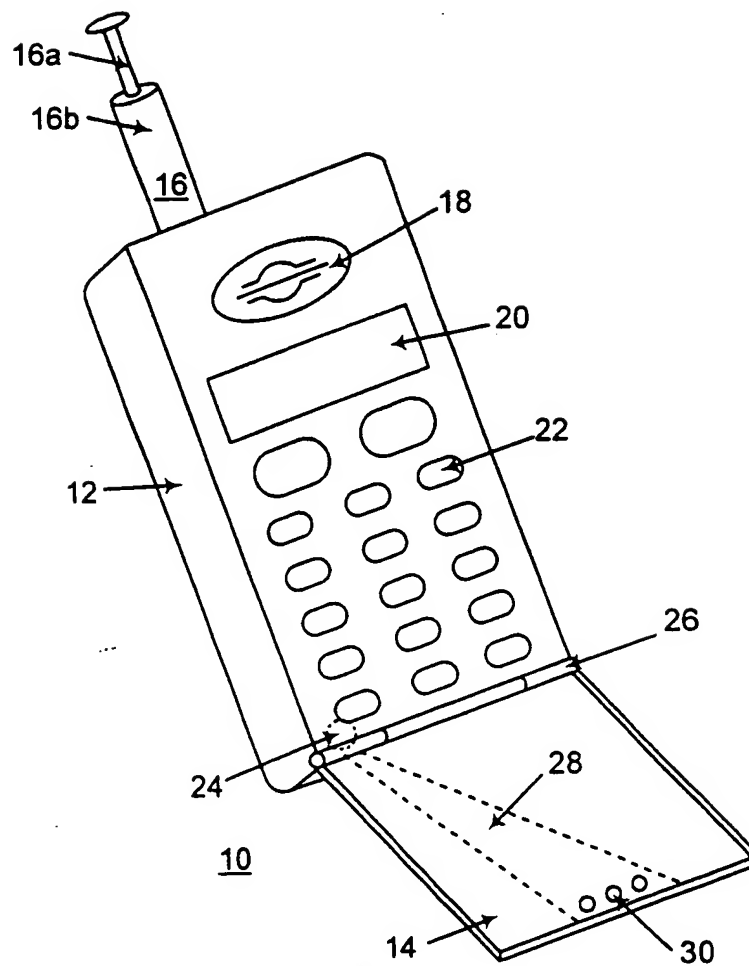


FIG 2

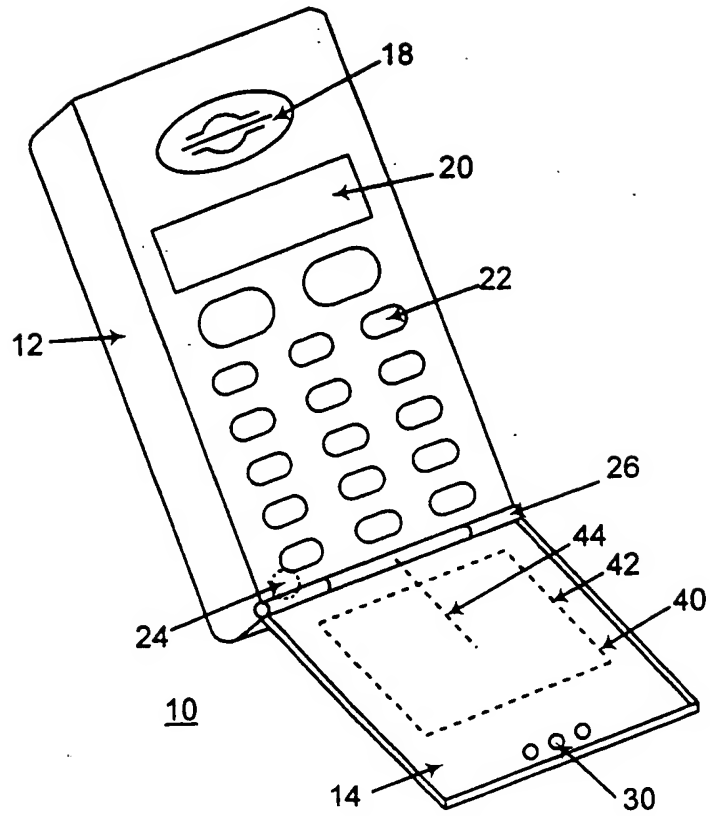


FIG 3

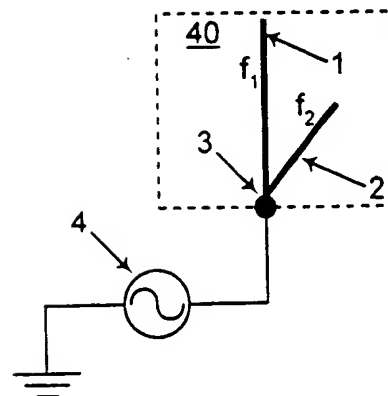


FIG 4

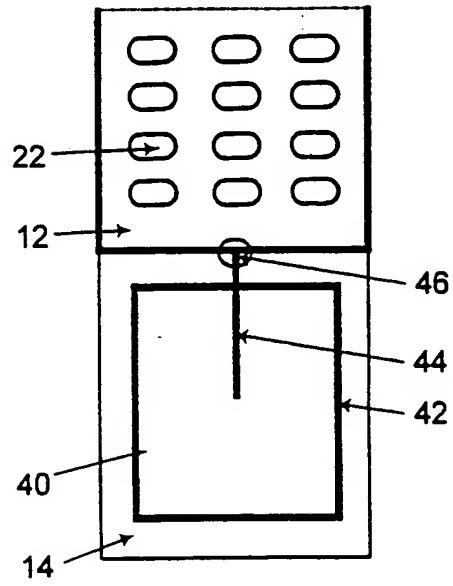


FIG 5

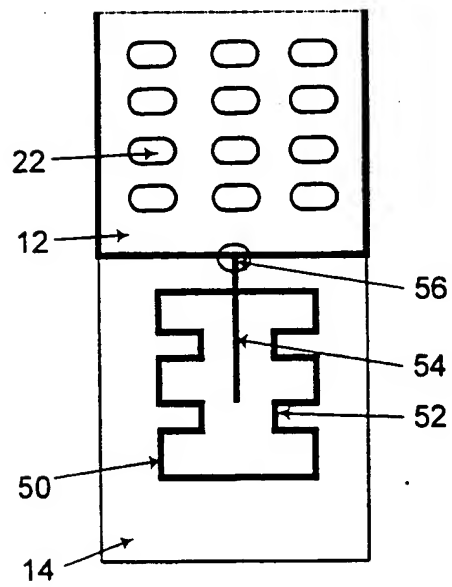


FIG 6

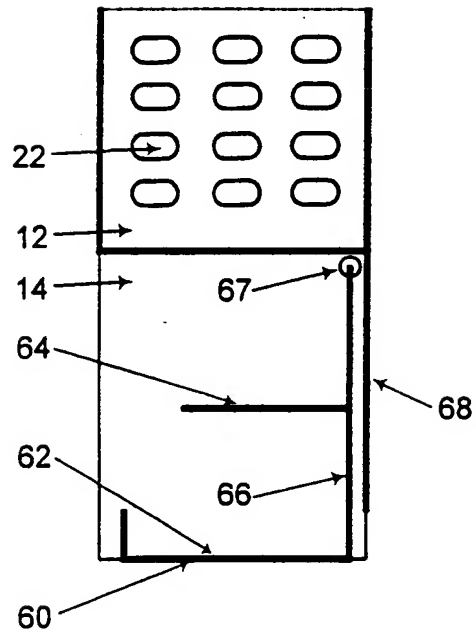


FIG 7


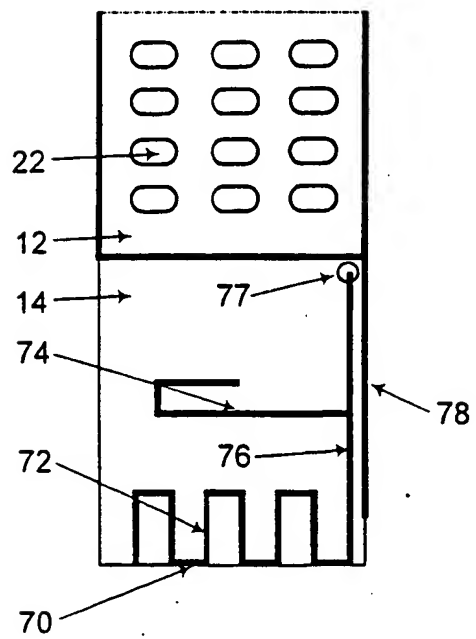


FIG 8

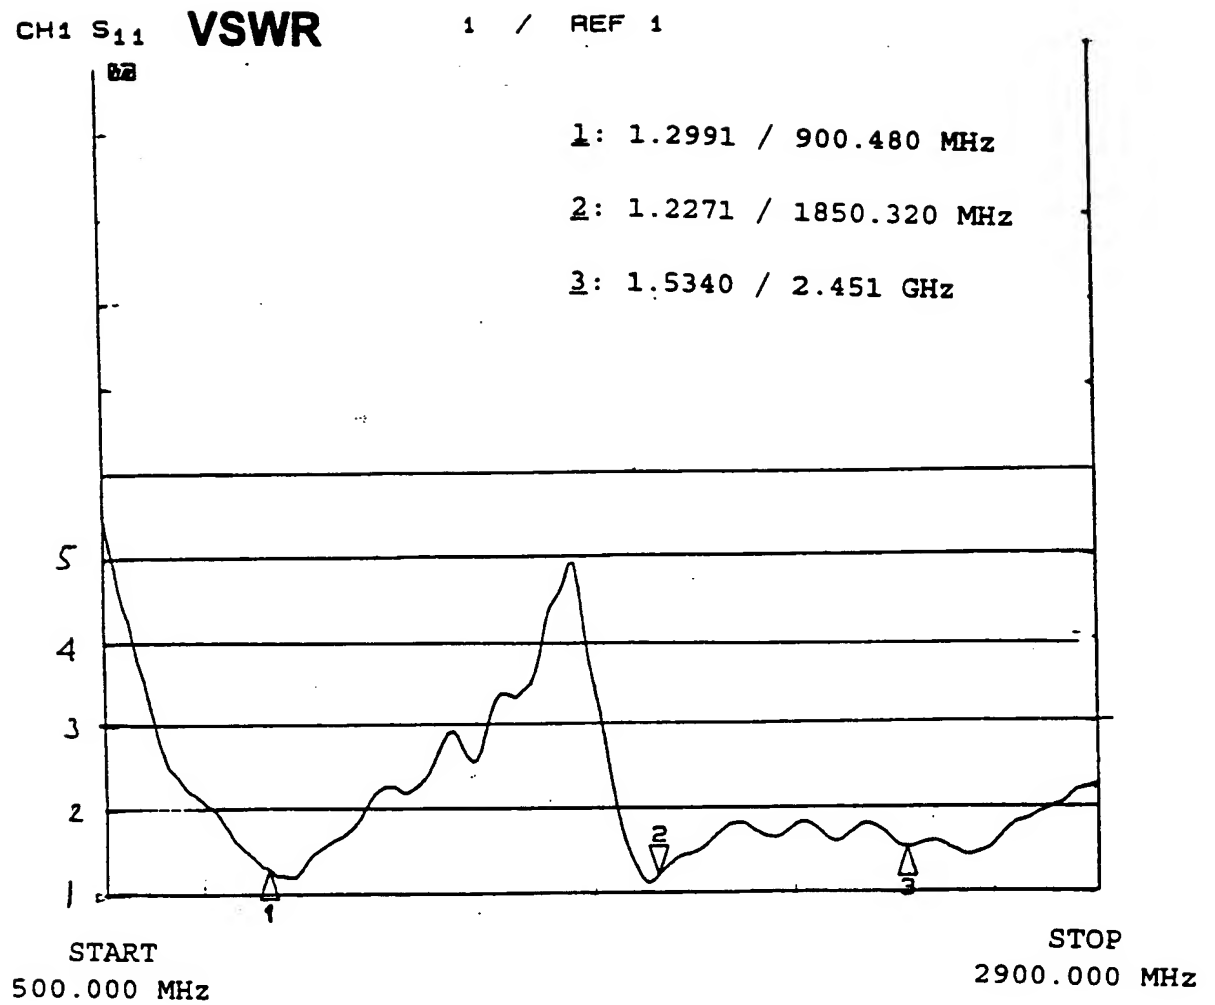

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/01897

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H01Q 1/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2293276 A (MOTOROLA INC), 20 March 1996 (20.03.96), figure 1, claim 1, abstract --	1-11
A	GB 2291542 A (MOTOROLA INC), 24 January 1996 (24.01.96), figure 1, claim 1, abstract --	1-11
A	WO 9638882 A1 (ERICSSON INC.), 5 December 1996 (05.12.96), cited in the application --	1-11
A	WO 9425999 A1 (MOTOROLA INC.), 10 November 1994 (10.11.94), cited in the application --	1-11



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 March 1999

Date of mailing of the international search report

26-03-1999

Name and mailing address of the ISA

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Rune Bengtsson

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/01897

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5337061 A (MICHAEL R. PYE ET AL), 9 August 1994 (09.08.94), cited in the application -----	1-11

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/03/99

International application No.

PCT/SE 98/01897

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2293276 A	20/03/96	BR 9504011 A	24/09/96
		CA 2155388 A	16/03/96
		CN 1127960 A	31/07/96
		DE 19531376 A,C	28/03/96
		FR 2724794 A,B	22/03/96
		GB 9518349 D	00/00/00
		JP 8097617 A	12/04/96
		SG 32491 A	13/08/96
		US 5542106 A	30/07/96
GB 2291542 A	24/01/96	BR 9502351 A	18/06/96
		CA 2152860 A	16/01/96
		CN 1120250 A	10/04/96
		DE 19525047 A,C	25/01/96
		FI 953214 A	16/01/96
		FR 2722626 A,B	19/01/96
		GB 9514122 D	00/00/00
		JP 8046416 A	16/02/96
		US 5554996 A	10/09/96
WO 9638882 A1	05/12/96	AU 5955796 A	18/12/96
		CN 1191633 A	26/08/98
		EP 0829113 A	18/03/98
WO 9425999 A1	10/11/94	AU 668309 B	26/04/96
		AU 6589294 A	21/11/94
		CA 2137458 A	10/11/94
		CN 1108461 A	13/09/95
		EP 0658280 A	21/06/95
		FR 2704986 A,B	10/11/94
		GB 2283862 A,B	17/05/95
		GB 9425542 D	00/00/00
		JP 7508871 T	28/09/95
		SE 9404526 A	01/03/95
		SG 44647 A	19/12/97
		US 5508709 A	16/04/96
US 5337061 A	09/08/94	AU 656555 B	09/02/95
		AU 1089892 A	20/08/92
		CA 2061033 A,C	13/08/92
		DE 69222218 D,T	29/01/98
		EP 0508567 A,B	14/10/92
		FI 920568 A	13/08/92
		GB 2255460 A,B	04/11/92
		JP 5075320 A	26/03/93